

Mobile Application Development

Produced
by

David Drohan (ddrohan@wit.ie)

Department of Computing & Mathematics
Waterford Institute of Technology

<http://www.wit.ie>



Waterford Institute of Technology
INSTITIÚID TEICNEOLAÍOCHTA PHORT LÁIRGE





Android Google Services Part 1

Google+ Sign-in





Google Services Overview *

- ❑ Overview of **Google Play Services** and Setup
- ❑ Detailed look at
 - Google+ Sign-in and Authentication (Part 1)
 - Location & Geocoding (Part 2)
 - Google Maps (Part 3)



Google Services Overview

- ❑ Overview of **Google Play Services** and Setup
- ❑ Detailed look at
 - **Google+ Sign-in and Authentication (Part 1)**




General Overview – What is it?

- ❑ Google Play Services is *"a single place that brings in all of Google's APIs on Android 2.2 and above."*
- ❑ With Google Play Services, your app can take advantage of the latest, Google-powered features such as **Maps**, **Google+**, and more, with automatic platform updates distributed as an APK through the Google Play store.
- ❑ This makes it faster for users to receive updates and easier for developers to integrate the newest that Google has to offer.



Overview – How it Works (Google Play Services)

- ❑ The **Google Play services** APK on user devices receives regular updates for new APIs, features, and bug fixes.

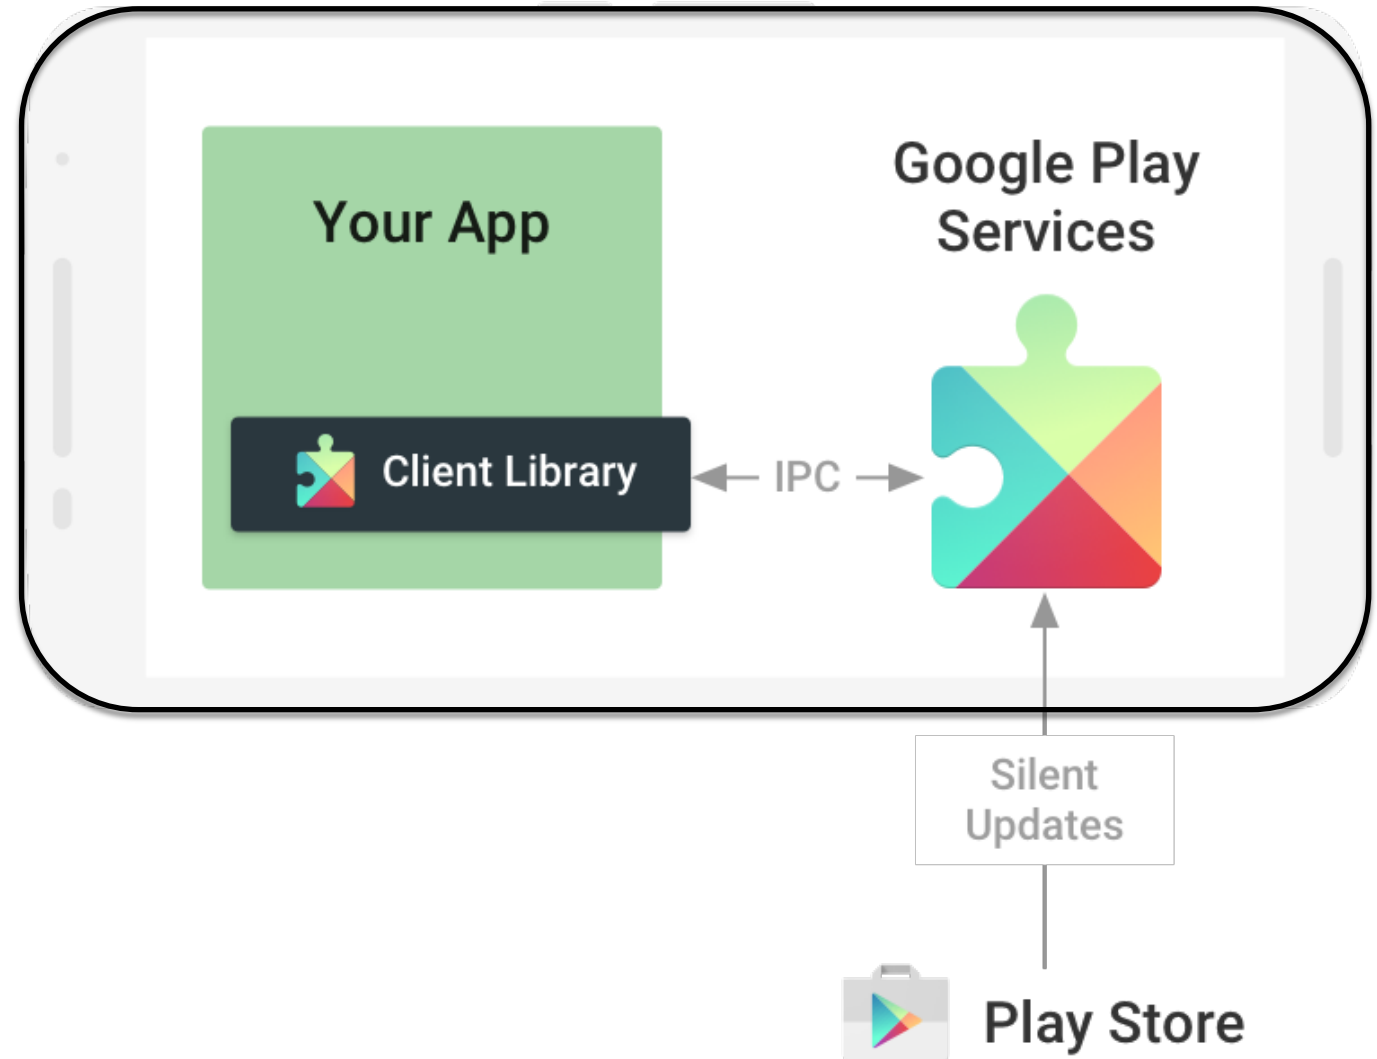



Overview – How it Works (Google API Client)

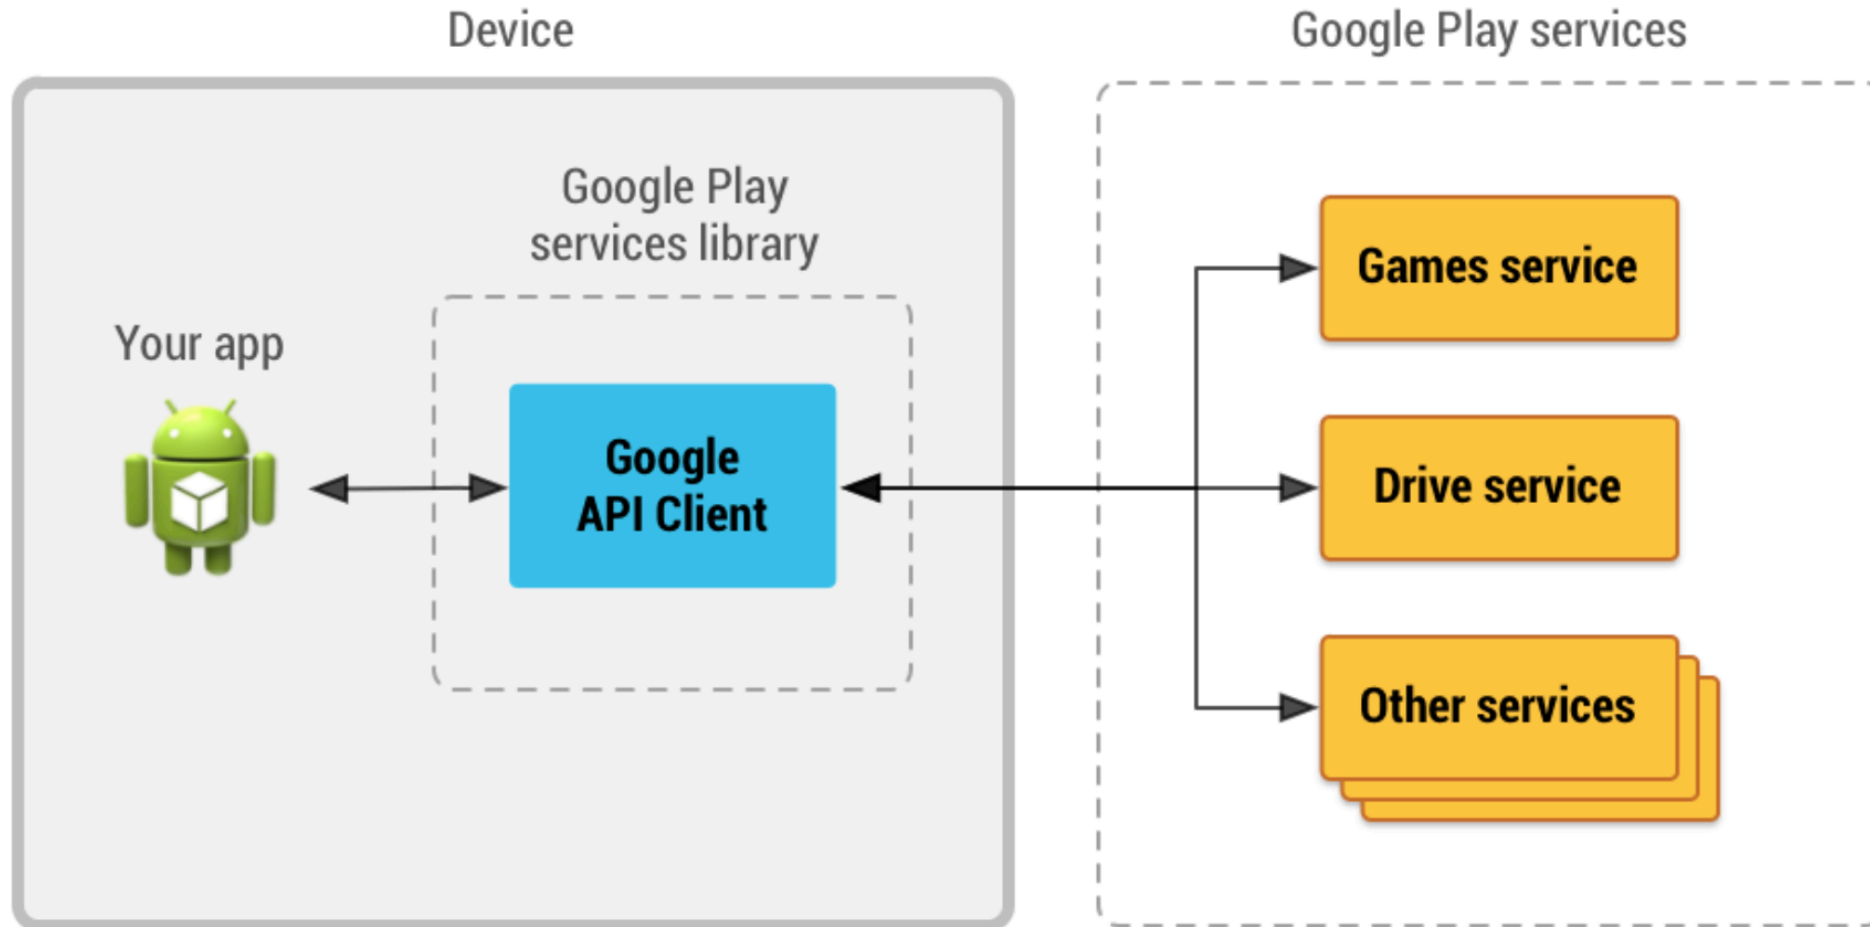


Figure 1: An illustration showing how the Google API Client provides an interface for connecting and making calls to any of the available Google Play services such as Google Play Games and Google Drive.



Overview – What You Get

Build better apps with Google

Take advantage of the latest Google technologies through a single set of APIs, delivered across Android devices worldwide as part of Google Play services.

Start by setting up the Google Play services library, then build with the APIs you need.

- › Set up Google Play services
- › API Reference

<https://developers.google.com/android/guides/overview>





Setting Up Google Play Services





Download Google Play Services (Android SDK Manager)

The screenshot shows the Android SDK Manager window. The title bar reads "Android SDK Manager". Below the title bar, the "SDK Path" is set to "/Users/ddrohan/env/appdev/android". The main area is titled "Packages" and contains a table with columns for "Name", "API", "Rev.", and "Status". The "Extras" folder is expanded, and the "Google Play services" package is selected and highlighted in blue. A black rounded rectangle highlights the "Google Play services" row. At the bottom of the window, there are filters for "Show:" with options for "Updates/New", "Installed" (checked), and "Obsolete". There are also buttons for "Install packages...", "Delete packages...", and "Deselect All". The status bar at the bottom of the window says "Done loading packages."

Name	API	Rev.	Status
Tools			
Android 6.0 (API 23)			
Android 5.1.1 (API 22)			
Android 5.0.1 (API 21)			
Android 4.4W.2 (API 20)			
Android 4.4.2 (API 19)			
Android 4.0.3 (API 15)			
Android 2.3.3 (API 10)			
Extras			
Local Maven repository for Support Libraries	28		Installed
Android Support Library	23.2.1		Installed
Google Play services for Froyo	12		Installed
Google Play services	29		Installed
Google Repository	25		Installed
Google Play APK Expansion Library	3		Installed
Google Play Billing Library	5		Installed
Google Play Licensing Library	2		Installed
Android Auto API Simulators	1		Installed
Intel x86 Emulator Accelerator (HAXM installer)	6.0.1		Installed

Setting Up Google Play Services




(<https://developer.android.com/google/play-services/setup.html>)

- ❑ Make sure that the Google Play services SDK is installed, as shown on the previous slide.
- ❑ Create an application using Android Studio.
- ❑ In Android Studio under “Gradle Scripts”, edit the build.gradle file for “Module: app”

(not the build.gradle file for the project)

Under dependencies (near the bottom), add the following line at the end:

```
compile 'com.google.android.gms:play-services-location:9.8.0'
```

- ❑ Save the changes and click “Sync Project with Gradle Files” in the toolbar, or click on menu item 

Tools → Android → Sync Project with Gradle Files.



Setting Up Google Play Services (continued)

- When we're finished **CoffeeMate**, our 'dependencies' will look something like this (version numbers may differ)...

```
dependencies {
  compile fileTree(dir: 'libs', include: ['*.jar'])
  testCompile 'junit:junit:4.12'

  compile 'com.android.support:appcompat-v7:23.2.1'
  compile 'com.android.support:design:23.2.1'
  compile 'com.google.code.gson:gson:2.2.3'
  compile 'com.google.android.gms:play-services-maps:8.1.0'
  compile 'com.google.android.gms:play-services-location:8.1.0'
  compile 'com.google.android.gms:play-services:8.1.0'
  compile 'com.android.support:support-v4:23.2.1'
}
```



Setting Up Google Play Services (continued)

- ❑ Edit file `AndroidManifest.xml` and add the following tag as a child of the `<application>` element:

```
<meta-data android:name="com.google.android.gms.version"  
           android:value="@integer/google_play_services_version"/>
```

Note: You can ignore instructions about creating a ProGuard exception if you are building in debug mode (i.e., not release mode).



Testing Google Play Services

To test an application using the Google Play services SDK, you must use either

- ❑ A compatible Android device that runs Android 2.3 or higher and includes Google Play Store
- ❑ An Android emulator (virtual device) that runs the Google APIs platform based on Android 4.2.2 or higher (Genymotion is a good one to use – Part 2)



Popular APIs (100+ in total) *



Google Cloud APIs

- Compute Engine API
- BigQuery API
- Cloud Storage Service
- Cloud Datastore API
- Cloud Deployment Manager API
- Cloud DNS API
- ⌵ More



Google Maps APIs

- Google Maps Android API
- Google Maps SDK for iOS
- Google Maps JavaScript API
- Google Places API for Android
- Google Places API for iOS
- Google Maps Roads API
- ⌵ More



Google Apps APIs

- Drive API
- Calendar API
- Gmail API
- Sheets API
- Google Apps Marketplace SDK
- Admin SDK
- ⌵ More



YouTube APIs

- YouTube Data API
- YouTube Analytics API
- YouTube Reporting API



Advertising APIs

- AdSense Management API
- DCM/DFA Reporting And Trafficking API
- Ad Exchange Seller API
- Ad Exchange Buyer API
- DoubleClick Search API
- DoubleClick Bid Manager API



Other popular APIs


- Analytics API
- Translate API
- Custom Search API
- URL Shortener API
- PageSpeed Insights API
- Fusion Tables API
- Web Fonts Developer API



Popular APIs (100+ in total) *



Mobile APIs

- [Google Cloud Messaging](#) 
- [Google Play Game Services](#)
- [Google Play Developer API](#)
- [Google Places API for Android](#)



Social APIs

- [Google+ API](#)
- [Blogger API](#)
- [Google+ Pages API](#)
- [Google+ Domains API](#)



Part 1

Google+ Sign-in





Introduction

- ❑ With the **Google+ Platform for Android**, you can allow application users to sign in with their existing Google+ accounts.
- ❑ It helps you in knowing your end users and providing them with a better enriched experience in your application.
- ❑ As soon as a user allows your app to use Google+ Sign In, you can easily get info about the user and people in the users circles.
- ❑ You can also get access to post on Google+ on the users behalf.

Overall, it is quick and easy way to engage end users in your application.



Google+ Sign-in Requirements

- ❑ For integrating Google+ Sign-in into your Android Application, we need to complete the following :
 1. Enable Google+ API on [The Developers Console](#) and create credentials for your application authentication
 2. Configuring Google Play Services in Android Studio
 3. Create your Android Application with Google+ Sign-in



1. Enable Google+ API on The Developers Console

- ① Go to [Google Developers Console](#)
- ② If you don't have any existing projects, **Create Project**.
- ③ Select your project and choose **ENABLE API** on the menu.
- ④ Browse for **Google+ API** (under Social APIs) and turn **ON** its status by accepting terms and conditions.

Do not close developers console yet, you'll still use it to generate your authentication key in the next few steps.



1. Enable Google+ API on The Developers Console

This screenshot shows the Google APIs console interface for the 'CoffeeMate Project'. The 'API Manager' section is active, displaying a 'Library' view. A red box highlights the 'CoffeeMate Project' dropdown menu. The 'Library' sidebar is expanded, showing 'Dashboard', 'Library', and 'Credentials'. The 'Library' section is selected, displaying a search bar and a list of 'Popular APIs'. Under 'Social APIs', the 'Google+ API' is highlighted with a red box. A blue arrow points from this box to the 'Google+ API' entry in the right-hand screenshot.

This screenshot shows the details page for the 'Google+ API' in the Google APIs console. The 'API Manager' section is active, displaying a 'Dashboard' view. The 'Google+ API' is highlighted, and its status is shown as 'DISABLE'. The 'About this API' section is visible, along with dropdown menus for 'All API versions', 'All API credentials', and 'All API methods'.



1. Enable Google+ API on The Developers Console

⑤ Generate your SHA1 fingerprint

1. You can either use the java keytool utility, like so

```
keytool -list -v -keystore "%USERPROFILE%\android\debug.keystore" -alias androiddebugkey -storepass android -keypass android
```

```
id -keypass android
Alias name: androiddebugkey
Creation date: Jan 14, 2015
Entry type: PrivateKeyEntry
Certificate chain length: 1
Certificate[1]:
Owner: CN=Android Debug, O=Android, C=US
Issuer: CN=Android Debug, O=Android, C=US
Serial number: 4a389ac6
Valid from: Wed Jan 14 23:06:23 IST 2015 until: Fri Jan 06 23:06:23 IST 2045
Certificate fingerprints:
    MD5: 8C:61:0E:B2:88:8F:56:D4:74:27:8C:69:D6:12:D9:0A
    SHA1: FD:0E:04:E9:99:28:B9:3D:E7:AC:75:AF:6E:2B:F6:E7:CD:EE:CA:96
    SHA256: F4:71:BA:32:83:C7:81:30:AF:A9:A0:25:6F:56:67:2F:4C:7C:FC:B3:67:
9D:8E:8A:16:CD:C8:11:CF:40:BD:0C
    Signature algorithm name: SHA256withRSA
    Version: 3

Extensions:
#1: ObjectId: 2.5.29.14 Criticality=false
SubjectKeyIdentifier [
KeyIdentifier [
0000: FE 4D 16 FF 11 AA 09 8F   FA B3 CF 4B 40 52 22 B8   .M.....KER".
0010: 80 87 90 5B               ...[
]
]
```



1. Enable Google+ API on The Developers Console

⑤ Generate your SHA1 fingerprint

1. You can
 1. Click on your package and choose New -> Google -> Google Maps Activity
 2. Android Studio redirects you to google_maps_api.xml with your SHA1

This gives you A LOT of extra 'bolierplate' code that you might not even need (if you're not using maps)



1. Enable Google+ API on The Developers Console

⑤ Generate your SHA1 fingerprint

1. Or you can
 1. Open/View Your Project
 2. Click on **Gradle** (From Right Side Panel, you will see **Gradle Bar**)
 3. Click on **Refresh** (Click on Refresh from Gradle Bar, you will see List Gradle scripts of your Project)
 4. Click on Your **Project** (Your Project Name from List (root))
 5. Click on **Tasks**
 6. Click on **android**
 7. Double Click on **signingReport** (You will get SHA1 and MD5 in Run Bar)

This is probably the simplest approach with minimal fuss! IMHO



1. Enable Google+ API on The Developers Console

Gradle projects

CoffeeMate.6.0

- CoffeeMate.6.0 (root)
 - Tasks
 - android
 - signingReport
 - sourceSets
 - build
 - build setup
 - help
 - install

Displays the signing info for each variant.

Run: AVD: Nexus_5_API_23 CoffeeMate.6.0 [signingReport]

```
Variant: releaseUnitTest
Config: none
-----
Variant: release
Config: none
-----
Variant: debugUnitTest
Config: debug
Store: /Users/ddrohan/.android/debug.keystore
Alias: AndroidDebugKey
MD5: 51:48:B5:A6:BA:4C:F1:25:E6:63:91:91:72:3F:D5:A1
SHA1: AA:F1:F0:95:54:89:99:5F:4F:54:F9:3A:AE:49:48:93:9C:79:E3:C6
Valid until: Tuesday, February 23, 2014
-----

BUILD SUCCESSFUL

Total time: 22.62 secs
09:19:35: External task execution finished 'signingReport'.
```



1. Enable Google+ API on The Developers Console

- ⑥ Navigate to Credentials -> Create Credentials -> API Key -> Android Key,
- ⑦ It will ask to **Configure consent screen** if not configured before. Fill in the necessary information and save. It will redirect you back to the creation page.
- ⑧ Give your Key a **Name** and **Add package name and fingerprint**
- ⑨ Enter your package name and your SHA1 fingerprint (generated previously) and click **Create**

You now have your API Key which you can use in your Android Apps to use the Google APIs



1. Enable Google+ API on The Developers Console

The screenshot shows the Google APIs console interface for a project named 'CoffeeMate Project'. The left sidebar contains navigation options: 'Dashboard', 'Library', and 'Credentials'. The main area is titled 'Credentials' and has three tabs: 'Credentials', 'OAuth consent screen', and 'Domain verification'. A red box highlights the 'Create credentials' button, which has a dropdown arrow. A blue arrow points from this button to the 'Create Android API key' dialog box on the right.

The 'Create Android API key' dialog box is shown with a red border. It contains the following fields and options:

- Name:** A text input field containing 'CoffeeMate Key'.
- Restrict usage to your Android apps (Optional):** A section with a link to 'Learn more' and instructions to add package name and SHA-1 signing-certificate fingerprint. Below this is a code block containing the command: `$ keytool -list -v -keystore mystore.keystore`.
- Package name:** A text input field containing 'ie.cm'.
- SHA-1 certificate fingerprint:** A text input field containing '12:34:56:78:90:AB:CD:EF:12:34:56:78:90:AB:CD:EF:AA:BB:CC:DD'.
- + Add package name and fingerprint:** A button to add more entries.
- Note:** 'It may take up to 5 minutes for settings to take effect.'
- Buttons:** 'Create' and 'Cancel' buttons.



1. Enable Google+ API on The Developers Console

Google APIs CoffeeMate Project

API Manager

Dashboard

Library

Credentials

Credentials OAuth consent screen Domain verification

Create credentials Delete

Create credentials to access your enabled APIs. [Refer to the API documentation](#) for details.

API keys

<input type="checkbox"/> Name	Creation date	Type	Key
<input type="checkbox"/> CoffeeMate Key	29 Aug 2016	Android	Alza[REDACTED]Khw



2. Configure Google Play Services

- ❑ Already Done! (from previous slides...)



3. Create your Android App (CoffeeMate)

- ❑ You'll cover this in the Labs, but we'll have a look at some of the code next



Steps in Integrating Google Sign-In into your App

- ❑ Import classes/interfaces.
- ❑ Declare that the activity implements callback interfaces.
- ❑ Declare/build **GoogleApiSignInOptions** object
- ❑ Declare/build **GoogleApiClient** object.
- ❑ Implement callback interfaces.
- ❑ Implement methods **onStart()** and **onStop()** (and possibly other lifecycle methods such as **onPause()** and **onResume()**) to gracefully handle connections to Google Play Services



Integrating Google Sign-In into Your Android App

<https://developers.google.com/identity/sign-in/android/sign-in>





Configure Google Sign-In & GoogleApiClient object

1. In your sign-in activity's `onCreate` method, configure Google Sign-In to request the user data required by your app. For example, to configure Google Sign-In to request users' ID and basic profile information, create a `GoogleSignInOptions` object with the `DEFAULT_SIGN_IN` parameter. To request users' email addresses as well, create the `GoogleSignInOptions` object with the `requestEmail` option.

```
// Configure sign-in to request the user's ID, email address, and basic
// profile. ID and basic profile are included in DEFAULT_SIGN_IN.
GoogleSignInOptions gso = new GoogleSignInOptions.Builder(GoogleSignInOptions.DEFAULT_SIGN_IN)
    .requestEmail()
    .build();
```

[SignInActivity.java](#) 

If you need to request additional scopes to access Google APIs, specify them with `requestScopes` .

Configure Google Sign-In & GoogleApiClient object *



2. Then, also in your sign-in activity's `onCreate` method, create a `GoogleApiClient` object with access to the Google Sign-In API and the options you specified.

```
// Build a GoogleApiClient with access to the Google Sign-In API and the
// options specified by gso.
mGoogleApiClient = new GoogleApiClient.Builder(this)
    .enableAutoManage(this /* FragmentActivity */, this /* OnConnectionFailedListener */)
    .addApi(Auth.GOOGLE_SIGN_IN_API, gso)
    .build();
```

[SignInActivity.java](#)

★ **Note:** To use `enableAutoManage`, your activity must extend `FragmentActivity` or `AppCompatActivity` (a subclass of `FragmentActivity`), both of which are part of the [Android Support Library](#). You can use `GoogleApiClient` in a `Fragment`; however, the fragment's parent activity must be a `FragmentActivity`. If you can't extend `FragmentActivity`, you must [manually manage the GoogleApiClient connection lifecycle](#).



Aside – Connecting to Google Drive Example *

```
GoogleApiClient mGoogleApiClient = new GoogleApiClient.Builder(this)
    .enableAutoManage(this /* FragmentActivity */,
        this /* OnConnectionFailedListener */)
    .addApi(Drive.API)
    .addScope(Drive.SCOPE_FILE)
    .build();
```


You can add multiple APIs and multiple scopes to the same `GoogleApiClient` by appending additional calls to `addApi()` and `addScope()`.



Add the Google Sign-In button to your app *

1. Add the `SignInButton` in your application's layout:

```
<com.google.android.gms.common.SignInButton  
    android:id="@+id/sign_in_button"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content" />
```



2. **Optional:** If you are using the default sign-in button graphic instead of providing your own sign-in button assets, you can customize the button's size and color scheme with the `setSize` and `setScopes` methods. Also, if you specify a Google+ social scope to `setScopes`, the sign-in button will be rendered with the red Google+ branding.

```
SignInButton signInButton = (SignInButton) findViewById(R.id.sign_in_button);  
signInButton.setSize(SignInButton.SIZE_STANDARD);  
signInButton.setScopes(gso.getScopeArray());
```

[SignInActivity.java](#) 

3. In the Android activity (for example, in the `onCreate` method), register your button's `OnClickListener` to sign in the user when clicked:

```
findViewById(R.id.sign_in_button).setOnClickListener(this);
```



Start the sign-in flow

1. In the activity's `onClick` method, handle sign-in button taps by creating a sign-in intent with the `getSignInIntent` method, and starting the intent with `startActivityForResult`.

```
@Override
public void onClick(View v) {
    switch (v.getId()) {
        case R.id.sign_in_button:
            signIn();
            break;
        // ...
    }
}
```

Choose account for Instacart



Nikhil Corlett
nikcorlett@gmail.com

Add account




Start the sign-in flow

```
private void signIn() {  
    Intent signInIntent = Auth.GoogleSignInApi.getSignInIntent(mGoogleApiClient);  
    startActivityForResult(signInIntent, RC_SIGN_IN);  
}
```

[SignInActivity.java](#) 

Starting the intent prompts the user to select a Google account to sign in with. If you requested scopes beyond `profile`, `email`, and `openid`, the user is also prompted to grant access to the requested resources.

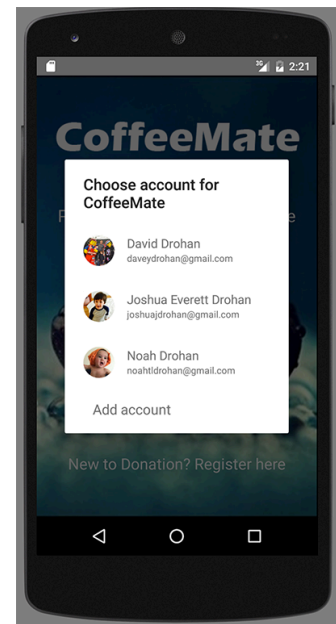



Start the sign-in flow

2. In the activity's `onActivityResult` method, retrieve the sign-in result with `getSignInResultFromIntent`.

```
@Override
public void onActivityResult(int requestCode, int resultCode, Intent data) {
    super.onActivityResult(requestCode, resultCode, data);

    // Result returned from launching the Intent from GoogleSignInApi.getSignInIntent(...);
    if (requestCode == RC_SIGN_IN) {
        GoogleSignInResult result = Auth.GoogleSignInApi.getSignInResultFromIntent(data);
        handleSignInResult(result);
    }
}
```

[SignInActivity.java](#) 

After you retrieve the sign-in result, you can check if sign-in succeeded with the `isSuccess` method. If sign-in succeeded, you can call the `getSignInAccount` method to get a `GoogleSignInAccount` object that contains information about the signed-in user, such as the user's name.



Start the sign-in flow *

```
private void handleSignInResult(GoogleSignInResult result) {
    Log.d(TAG, "handleSignInResult:" + result.isSuccess());
    if (result.isSuccess()) {
        // Signed in successfully, show authenticated UI.
        GoogleSignInAccount acct = result.getSignInAccount();
        mStatusTextView.setText(getString(R.string.signed_in_fmt, acct.getDisplayName()));
        updateUI(true);
    } else {
        // Signed out, show unauthenticated UI.
        updateUI(false);
    }
}
```

[SignInActivity.java](#) 

You can also get the user's email address with `getEmail`, the user's Google ID (for client-side use) with `getId`, and an ID token for the user with `getIdToken`. If you need to pass the currently signed-in user to a backend server, [send the ID token to your backend server](#) and validate the token on the server.

Key Interfaces/Classes for Google Sign-In

(in package `com.google.android.gms.auth.api.signin`)



❑ `GoogleSignInAccount`

<code>String</code>	<code>getDisplayName()</code> Returns the display name of the signed in user if you built your configuration starting from <code>new GoogleSignInOptions.Builder(GoogleSignInOptions.DEFAULT_SIGN_IN)</code> or with <code>requestProfile()</code> configured; <code>null</code> otherwise.
<code>String</code>	<code>getEmail()</code> Returns the email address of the signed in user if <code>requestEmail()</code> was configured; <code>null</code> otherwise.

❑ `GoogleSignInOptions.Builder`

<code>GoogleSignInOptions</code>	<code>build()</code> Builds the <code>GoogleSignInOptions</code> object.
<code>GoogleSignInOptions.Builder</code>	<code>requestEmail()</code> Specifies that email info is requested by your application.
<code>GoogleSignInOptions.Builder</code>	<code>requestId()</code> Specifies that user ID is requested by your application.
<code>GoogleSignInOptions.Builder</code>	<code>requestIdToken(String serverClientId)</code> Specifies that an ID token for authenticated users is requested.

Key Interfaces/Classes for Google Sign-In

(in package `com.google.android.gms.common.api`)



□ `GoogleApiClient`

void	<code>connect(int signInMode)</code> Connects the client to Google Play services using the given sign in mode.
abstract void	<code>disconnect()</code> Closes the connection to Google Play services.
abstract boolean	<code>isConnected()</code> Checks if the client is currently connected to the service, so that requests to other methods will succeed.

□ `GoogleApiClient.Builder`

`GoogleApiClient.Builder(Context context)`
Builder to help construct the `GoogleApiClient` object.

`GoogleApiClient.Builder(Context context, GoogleApiClient.ConnectionCallbacks connectedListener, GoogleApiClient.OnConnectionFailedListener connectionFailedListener)`
Builder to help construct the `GoogleApiClient` object.

Key Interfaces/Classes for Google Sign-In

(in package `com.google.android.gms.common.api`)



□ `GoogleApiClient.ConnectionCallbacks`

abstract void `onConnected(Bundle connectionHint)`

After calling `connect()`, this method will be invoked asynchronously when the connect request has successfully completed.

abstract void `onConnectionSuspended(int cause)`

Called when the client is temporarily in a disconnected state.

□ `GoogleApiClient.OnConnectionFailedListener`

abstract void `onConnectionFailed(ConnectionResult result)`

Called when there was an error connecting the client to the service.

Key Interfaces/Classes for Google Sign-In

(in package `com.google.android.gms.common.api`)



❑ `GoogleApiClient`

- main entry point for Google Play services integration

❑ `GoogleApiClient.ConnectionCallbacks`

- provides callbacks that are called when the client is connected or disconnected from the service

- abstract methods:

`void onConnected(Bundle connectionHint)`

`void onConnectionSuspended(int cause)`

❑ `GoogleApiClient.OnConnectionFailedListener`

- provides callbacks for scenarios that result in a failed attempt to connect the client to the service

- abstract method:

`void onConnectionFailed(ConnectionResult result)`



CoffeeMate 5.0

Code Highlights



CoffeeMateApp (Application) *

```
/* Client used to interact with Google APIs. */
```

```
public GoogleApiClient mGoogleApiClient;  
public GoogleSignInOptions mGoogleSignInOptions;
```

```
public boolean signedIn = false;  
public String googleToken;  
public String googleName;  
public String googleMail;  
public String googlePhotoURL;  
public Bitmap googlePhoto;  
public int drawerID = 0;
```

- ❑ Here we declare our **GoogleSignInOptions** and **GoogleApiClient** references (and other variables) to store users Google+ info.
- ❑ We populate these objects in our 'Login' process.
- ❑ Volley Request Queue also set up here (see the labs for further details).



Login (Activity) *

```
public class Login extends FragmentActivity implements  
    GoogleApiClient.OnConnectionFailedListener,  
    OnClickListener {
```

- ❑ Our Login Activity implements the relevant interfaces
- ❑ Here we 'Build' our sign in options

```
// [START configure_signin]  
// Configure sign-in to request the user's ID, email address, and basic  
// profile. ID and basic profile are included in DEFAULT_SIGN_IN.
```

```
    app.mGoogleSignInOptions = new GoogleSignInOptions  
        .Builder(GoogleSignInOptions.DEFAULT_SIGN_IN)  
        .requestEmail()  
        .requestProfile()  
        .build();
```

```
// [END configure_signin]
```



Login (Activity) *

```
// [START build_client]
// Build a GoogleApiClient with access to the Google Sign-In API and the
// options specified by mGoogleSignInOptions.
```

```
app.mGoogleApiClient = new GoogleApiClient.Builder(this)
    .enableAutoManage(this /* FragmentActivity */,
        this /* OnConnectionFailedListener */)
    .addApi(Auth.GOOGLE_SIGN_IN_API, app.mGoogleSignInOptions)
    .build();
// [END build_client]
```

```
setContentView(R.layout.activity_login);
findViewById(R.id.sign_in_button).setOnClickListener(this);
findViewById(R.id.disconnect_button).setOnClickListener(this);
```

```
// [START signIn]
private void signIn() {
    Intent signInIntent = Auth.GoogleSignInApi.getSignInIntent(app.mGoogleApiClient);
    startActivityForResult(signInIntent, RC_SIGN_IN);
}
// [END signIn]
```

- ❑ Build our client with the specific sign in options and the API we want to use - (Google Sign-In)
- ❑ Try and sign in to Google



Login (Activity) *

```
public void onActivityResult(int requestCode, int resultCode, Intent data) {
    super.onActivityResult(requestCode, resultCode, data);
    // Result returned from launching the Intent from GoogleSignInApi.getSignInIntent(...);
    if (requestCode == RC_SIGN_IN) {
        GoogleSignInResult result = Auth.GoogleSignInApi.getSignInResultFromIntent(data);
        handleSignInResult(result);
    }
}
```

- ❑ If sign in result ok, handle it.

```
private void handleSignInResult(GoogleSignInResult result) {
    if (result.isSuccess()) {
        // Signed in successfully, show authenticated UI.
        GoogleSignInAccount acct = result.getSignInAccount();
        app.googleName = acct.getDisplayName();
        app.googleToken = acct.getId();
        app.signedIn = true;
        app.googleMail = acct.getEmail();
        if(acct.getPhotoUrl() == null)
            ; //New Account may not have Google+ photo
        else app.googlePhotoURL = acct.getPhotoUrl().toString();

        startHomeScreen();
    } else
        Toast.makeText(this, "Please Sign in " , Toast.LENGTH_SHORT).show();
}
```

- ❑ On successful sign in, get the users Google info
- ❑ Take the user to the 'Home' screen



CoffeeFragment (extracts) *

@Override

```
public View onCreateView(LayoutInflater inflater, ViewGroup container,
                        Bundle savedInstanceState) {
    // Inflate the layout for this fragment
    View v = null;
    v = inflater.inflate(R.layout.fragment_home, container, false);
    listView = (ListView) v.findViewById(R.id.coffeeList);

    mSwipeRefreshLayout = (SwipeRefreshLayout) v.findViewById(R.id.coffee_swipe_refresh_layout);
    setSwipeRefreshLayout();

    CoffeeApi.getAll("/coffees/" + app.googleToken, mSwipeRefreshLayout);

    return v;
}
```

- ❑ Setting up our 'Swipe Refresh'
- ❑ Retrieving all the coffees from the server



CoffeeFragment (extracts) *

```
@Override
```

```
public void onResume() {  
    super.onResume();
```

```
    CoffeeApi.attachListener(this);  
    CoffeeApi.getAll("/coffees/" + app.googleToken, mSwipeRefreshLayout);
```

```
@Override
```

```
public void onPause() {  
    super.onPause();
```

```
    CoffeeApi.detachListener();
```

Attach listener & retrieve coffees

Detach listener

Do we need 'getAll()' on the previous slide?



CoffeeFragment (extracts) *

- ❑ Deleting a single coffee

```
public void onCoffeeDelete(final Coffee coffee)
{
    String stringName = coffee.name;
    AlertDialog.Builder builder = new AlertDialog.Builder(getActivity());
    builder.setMessage("Are you sure you want to Delete the \'Coffee\' " + stringName + "?");
    builder.setCancelable(false);

    builder.setPositiveButton("Yes", (dialog, id) -> {
        CoffeeApi.delete("/coffees/" + app.googleToken + "/" + coffee._id);
        CoffeeApi.getAll("/coffees/" + app.googleToken, mSwipeRefreshLayout);
    }).setNegativeButton("No", (dialog, id) -> { dialog.cancel(); });
    AlertDialog alert = builder.create();
    alert.show();
}
```



CoffeeFragment (extracts) *

- ❑ Deleting multiple coffees

```
public void deleteCoffees(ActionMode actionMode)
{
    for (int i = listAdapter.getCount() - 1; i >= 0; i--) {
        if (listView.isItemChecked(i)) {
            CoffeeApi.delete("/coffees/" + app.googleToken + "/" + listAdapter.getItem(i)._id);
        }
        CoffeeApi.getAll("/coffees/" + app.googleToken, mSwipeRefreshLayout);
    }
    actionMode.finish();

    if (favourites) {
        //Update the filters data
        coffeeFilter = new CoffeeFilter(app.coffeeList, "favourites", listAdapter);
        coffeeFilter.filter(null);
    }
    listAdapter.notifyDataSetChanged();
}
```



Add (Fragment) *

```
if ((coffeeName.length() > 0) && (coffeeShop.length() > 0)
    && (price.length() > 0)) {
    Coffee c = new Coffee(coffeeName, coffeeShop, ratingValue,
        coffeePrice, false, app.googleToken, 0, 0, app.googlePhotoURL);
    CoffeeApi.post("/coffees/" + app.googleToken, c);
    Intent intent = new Intent(getActivity(), Home.class);
    getActivity().startActivity(intent);
}
```

- ❑ Creating a new coffee object
- ❑ Note the extra 'Google' parameters
- ❑ Updating our coffee data on the server



Edit (Fragment) *

```
@Override
public void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    if (getArguments() != null) {
        coffeeID = getArguments().getString("coffeeID");
    }
}




@Override
public void onResume() {
    super.onResume();

    CoffeeApi.attachListener(this);
    CoffeeApi.get("/coffees/" + app.googleToken + "/" + coffeeID);
    titleBar = (TextView) getActivity().findViewById(R.id.recentAddedBarTextView);
    titleBar.setText("Update a Coffee");
}
```

- ❑ ID passed from List (now a string value)
- ❑ Retrieving coffee data from server
- ❑ Saving our coffee data to the server

```
CoffeeApi.put("/coffees/" + app.googleToken + "/" + aCoffee._id, aCoffee);
```


CoffeeMate 5.0+

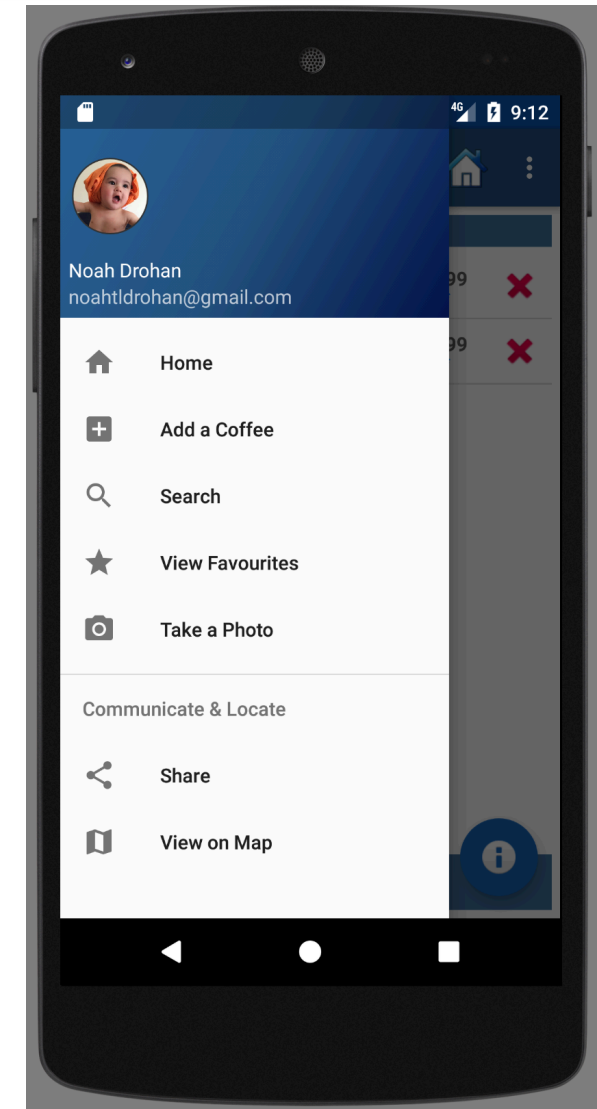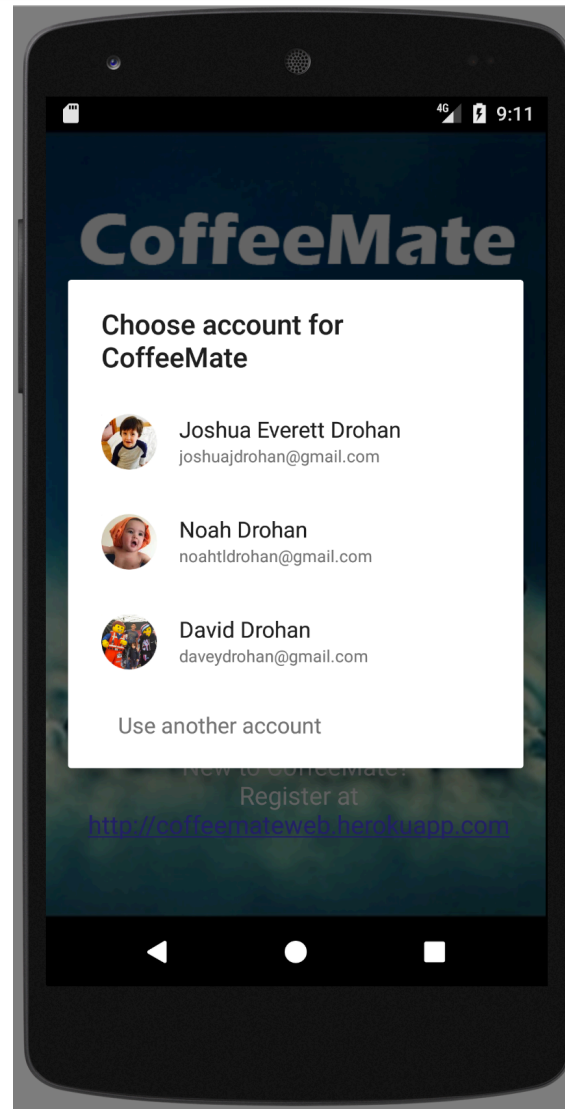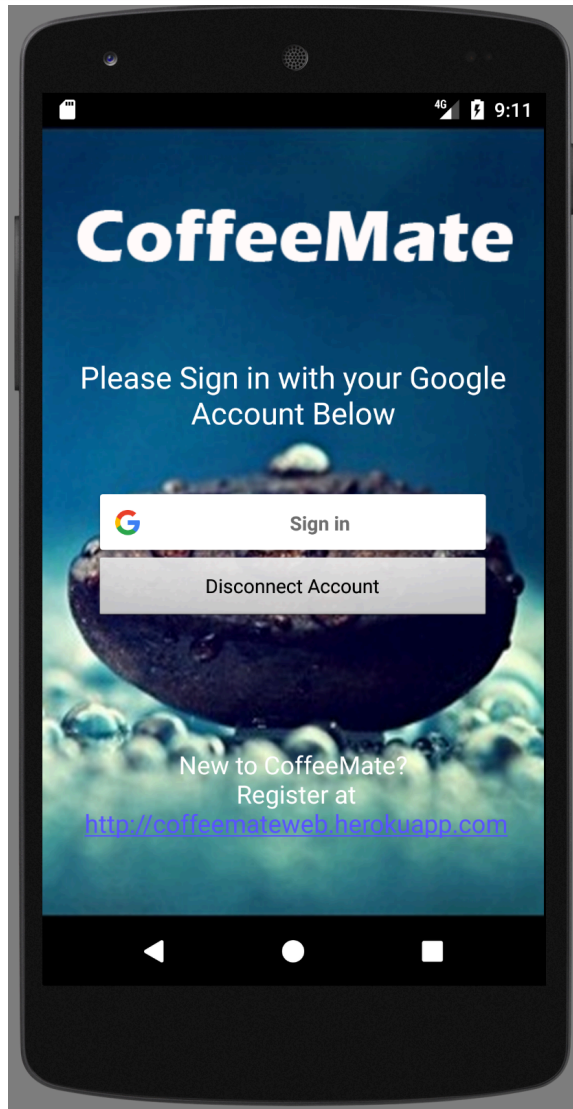



Relevant Links

- ❑ Setting Up Google Play Services

<https://developer.android.com/google/play-services/setup.html>

- ❑ Integrating Google+ Sign In into your Android Application

<http://androidsrc.net/integrating-google-plus-sign-in-into-your-android-application/>

- ❑ Official Docs

- ❑ <https://developers.google.com/identity/sign-in/android/sign-in>



Questions?